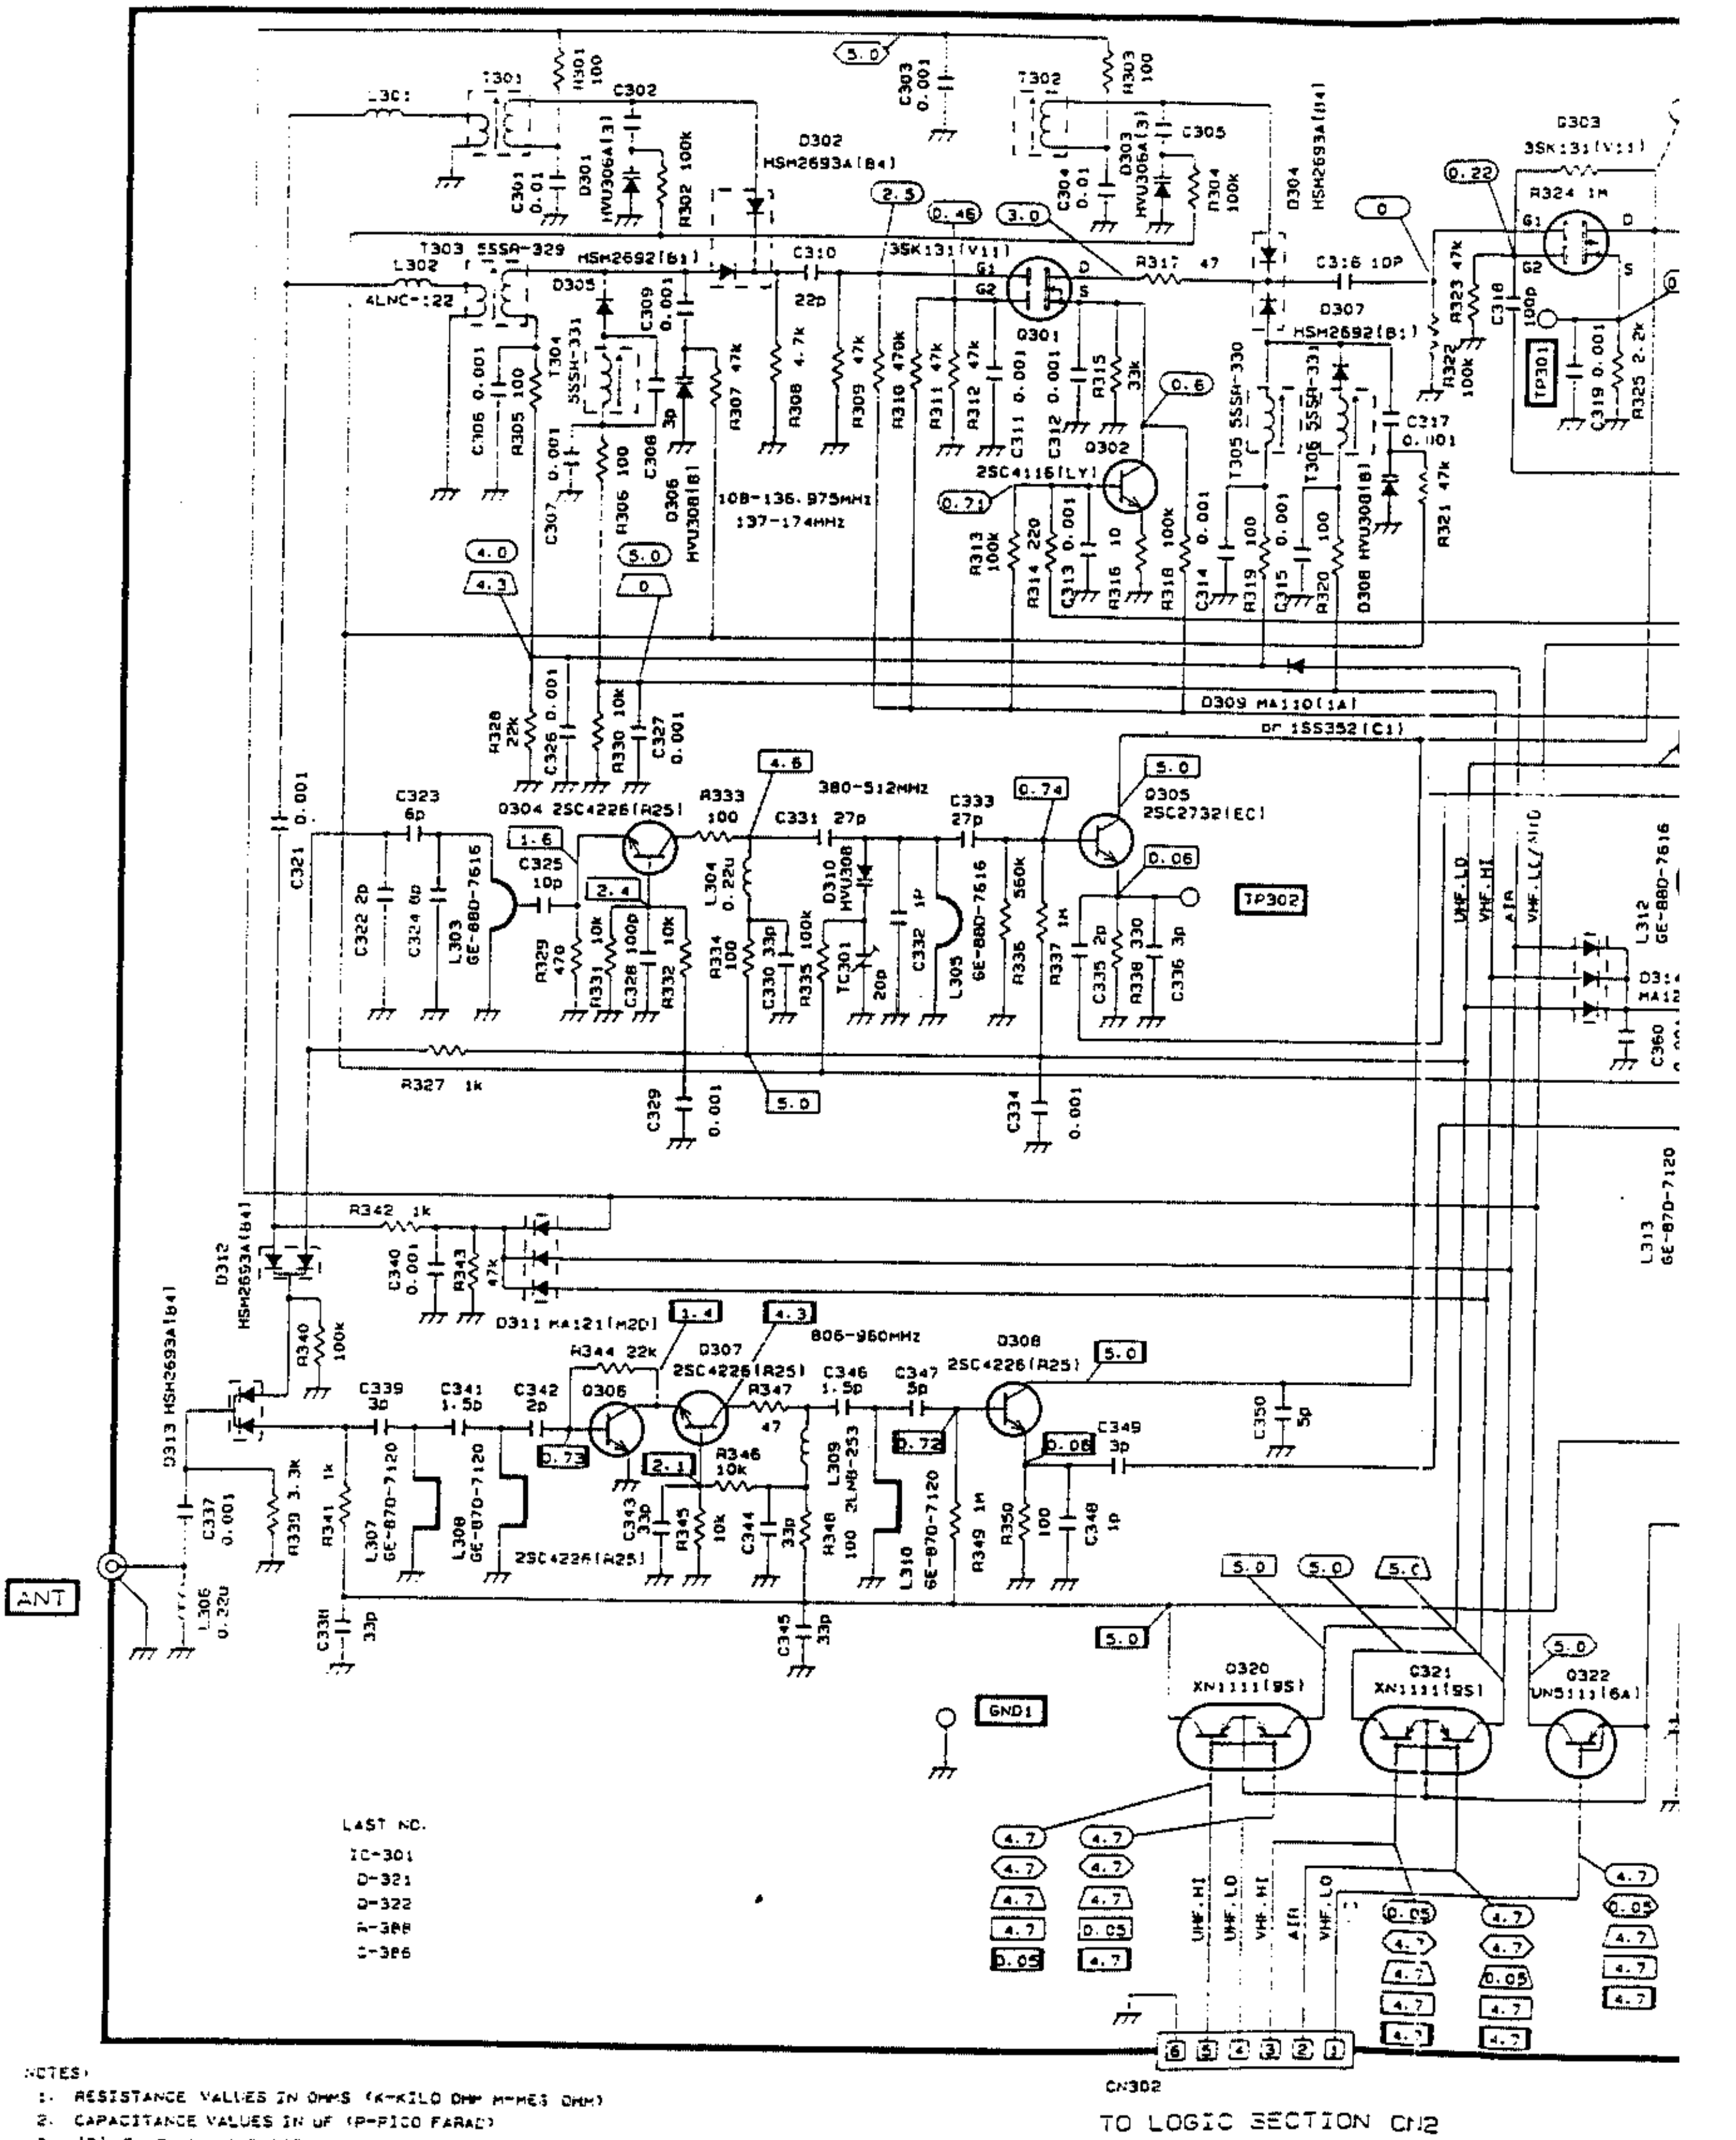


NOTES:
1. RESISTANCE VALUES IN OHMS (K=KILO OHM M=MEG OHM)
2. CAPACITANCE VALUES IN uF (P=PICO FARAD)
3. (T)-TANTALUM CAPACITOR
4. (M)-MYLAR CAPACITOR
5. NO SUFFIX: CERAMIC CAPACITOR
6. ⬭ THIS SYMBOL DENOTES DC VOLTAGE MEASURED WITH DC VOLTMETER (100kohm/V) UNDER FOLLOWING CONDITIONS. CH 1 HIGH BAND AT 150MHz. MANUAL OPERATION. VOLUME AT MINIMUM AND SQUELCH CCW
7. ⬭ THIS SYMBOL DENOTES DC VOLTAGE FOR LOW/MID BAND OPERATION
8. ⏢ THIS SYMBOL DENOTES DC VOLTAGE FOR AIRCRAFT BAND OPERATION
9. ▭ THIS SYMBOL DENOTES DC VOLTAGE FOR UHF LOW/T BAND OPERATION
10. ▭ THIS SYMBOL DENOTES DC VOLTAGE FOR UHF HIGH BAND OPERATION
11. RATING OR TYPE NUMBER OF COMPONENT PARTS ARE SUBJECT TO CHANGE FOR IMPROVEMENT WITHOUT NOTICE